

# ROUND RECESSED LED DOWNLIGHT

Code: BE-D2113

## 7-45W

DOWNLIGHT  
2.5" / 3.5" / 4" / 5" / 6"  
AC85-265V 50/60Hz  
5 YEARS WARRANTY



### Applications:

Ideal for Commercial Lighting, Offices, indoor Lighting.

### GENERAL INFORMATION

POWER	BODY COLOR	RELECTOR	PRODUCT CUTOUT	DIMMABLE
7W	Gray+White	Stripe Sliver	D95*H48r D80mm	Available
10W	Gray+White	Stripe Sliver	D117*H60r D100mm	Available
15W	Gray+White	Stripe Sliver	D136*H72r D120mm	Available
25W	Gray+White	Stripe Sliver	D165*H80r D140mm	Available
35W	Gray+White	Stripe Sliver	D198*H95r D170mm	Available
45W	Gray+White	Stripe Sliver	D220*H103 D200mm	Available

### TECHNICAL SPECIFICATIONS

Rated Voltage(V):	AC85-265V
Rated Frequency(Hz):	50-60Hz
Rated Power(W):	10-50W
Colour Temperature(K):	3000K-6000K
Led Chip	COB CREE
Luminous Efficiency(Lm/W):	100Lm/W
Beam Angle:	40 °
Colour Rendering Index:	80
Power Factor:	0.50
Material:	Die-cast Aluminum
Installation:	Recessed
Waterproof Grade:	IP65
Working Temperature:	-20~40°C
Average Life(Hrs):	50,000Hrs
Warranty	5 Years
Operation Position:	Universal
Quality Standard:	CE/RoHs

# ROUND RECESSED LED DOWNL

Code: BE-D2105

**5-30W**

DOWNLIGHT

3" / 4" / 5" / 6" / 8"

AC85-265V 50/60Hz

2-5 YEARS WARRANTY



## Applications:

Ideal for Commercial Lighting, Offices, indoor Lighting.

## GENERAL INFORMATION

POWER	BODY COLOR	RELECTOR	PRODUCT CUTOUT	DIMMABLE
5W	Gray+White	Sliver	D115*H48r D100mm	Available
10W	Gray+White	Sliver	D145*H62r D130mm	Available
15W	Gray+White	Sliver	D159*H60r D145mm	Available
20W	Gray+White	Sliver	D190*H60r D170mm	Available
30W	Gray+White	Sliver	D230*H72r D205mm	Available

## TECHNICAL SPECIFICATIONS

Rated Voltage(V):	AC85-265V
Rated Frequency(Hz):	50-60Hz
Rated Power(W):	5-30W
Colour Temperature(K):	3000K-6000K
Led Chip	SMD / COB
Luminous Efficiency(Lm/W):	90Lm/W
Beam Angle:	90° / 180°
Colour Rendering Index:	80
Power Factor:	0.50
Material:	Die-cast Aluminum
Installation:	Recessed
Waterproof Grade:	IP44/IP65
Working Temperature:	-20~40°C
Average Life(Hrs):	35,000Hrs
Operation Position:	Universal
Driver:	CE Driver
Quality Standard:	CE/RoHs

# ROUND SURFACED LED DOWNLIGHT

Code: BE-MD108R

**10-70W**

DOWNLIGHT  
3" / 3.5" / 4" / 5" / 6" / 8"  
AC85-265V 50/60Hz  
5 YEARS WARRANTY



## Applications:

Ideal for Commercial Lighting, Offices, indoor Lighting.

## GENERAL INFORMATION

POWER	BODY COLOR	RELECTOR	PRODUCT DIMMABLE
10W	Black/White	CH/BK/WH	D76*H150r Available
20W	Black/White	CH/BK/WH	D96*H150r Available
30W	Black/White	CH/BK/WH	D116*H150r Available
50W	Black/White	CH/BK/WH	D142*H170r Available
60W	Black/White	CH/BK/WH	D171*H180r Available
70W	Black/White	CH/BK/WH	D206*H210r Available

## TECHNICAL SPECIFICATIONS

Rated Voltage(V):	AC85-265V
Rated Frequency(Hz):	50-60Hz
Rated Power(W):	10-70W
Colour Temperature(K):	3000K-6000K
Led Chip	COB CREE
Luminous Efficiency(Lm/W):	90Lm/W
Beam Angle:	40 °
Colour Rendering Index:	80
Power Factor:	0.50
Material:	Die-cast Aluminum
Installation:	Surfaced/Suspension
Waterproof Grade:	IP44
Working Temperature:	-20~40°C
Average Life(Hrs):	50,000Hrs
Warranty	5 Years
Operation Position:	Universal
Quality Standard:	CE/RoHs

# ADJUSTABLE SURFACED DOWNLIGHT

Code: # BE-MD105

**10W**

LED DWON LIGHT  
D100\*H100mm  
AC180-260V 50/60Hz  
3 YEAR WARRANTY



## Applications:

Ideal for Commercial Lighting, Offices, indoor Lighting.

## GENERAL INFORMATION

Ref.Code:	BE-MD105
Description:	Surfaced Adjustable downlight
Product Size(MOD*MOL):	D100*H100mm
Color Finish	White / Black Non-Dimmable

## TECHNICAL SPECIFICATIONS

Rated Voltage(V):	AC180-265V
Rated Frequency(Hz):	50-60Hz
Rated Power(W):	10W
Colour Temperature(K):	4000K
Led Chip	COB
Luminous Flux(Lm):	1000Lm
Luminous Efficiency(Lm/W):	100Lm/W
Beam Angle:	40°
Colour Rendering Index:	80
Power Factor:	0.50
Adjustable angle:	90° and 360°
Material:	Aluminum
Waterproof Grade:	IP44
Average Life(Hrs):	35,000Hrs
Operation Position:	Universal
Application:	Indoor use

## DETAIL PHOTOES



# SUSPENSION LED DOWNLIGHT

Code: # BE-MD116-12

**12W**

LED DOWN LIGHT  
D60\*H300mm  
AC180-260V 50/60Hz  
5 YEAR WARRANTY



## Applications:

Ideal for Commercial Lighting, Offices, indoor Lighting.




## GENERAL INFORMATION

Ref.Code:	BE-MD116
Description:	Round black downlight with lens LED, Suspension LED Luminaire
Product Size(MOD*MOL):	D60*H300mm
Color Finish	Black
Suspension Wire	1 Meter
	Non-Dimmable

## TECHNICAL SPECIFICATIONS

Rated Voltage(V):	AC180-260V
Rated Frequency(Hz):	50-60Hz
Rated Power(W):	12W
Colour Temperature(K):	4000K
Led Chip	CREE LED Chip
Luminous Flux(Lm):	1200Lm
Luminous Efficiency(Lm/W):	100Lm/W
Beam Angle:	24°
Colour Rendering Index:	80
Power Factor:	0.90
Material:	Aluminum
Waterproof Grade:	IP44
Average Life(Hrs):	35,000Hrs
Operation Position:	Universal
Application:	Indoor use

## DETAIL PHOTOS

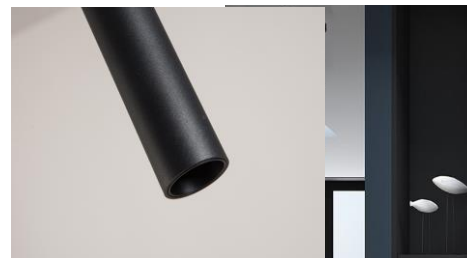

# ANTI-GLARE LED DOWNLIGHT

Code: # BE-D2106

**30W**

RECESSED  
D220\*H96mm  
AC220-240V 50/60Hz  
3 YEAR WARRANTY



## Applications:

Ideal for Commercial Lighting, Offices, indoor Lighting.

## GENERAL INFORMATION

Ref.Code:	BE-D2106-30
Description:	Deep anti-glare white surfaced ring with opal diffuser PMMA, recessed LED luminaire
Product Size(mm):	D220*H96mm
Cutout(mm):	D195mm
Color Finish	Frosted White
Reflector color	White
Installation method:	Recessed
Dimming	Non-Dimmable

## TECHNICAL SPECIFICATIONS

Rated Voltage(V):	AC220-240V
Rated Frequency(Hz):	50-60Hz
Rated Power(W):	30W
Colour Temperature(K):	4000K
Led Chip	Samsung LED Chip
Luminous Flux(Lm):	2700Lm
Luminous Efficiency(Lm/W):	90Lm/W
Beam Angle:	100°
Colour Rendering Index:	80
Power Factor:	0.90
Material:	Die-cast Aluminum
Waterproof Grade:	IP54
Average Life(Hrs):	35,000Hrs
Operation Position:	Universal
Application:	Indoor use

## DETAIL PHOTOES



# ANTI-GLARE LED DOWNLIGHT

Code: # BE-D2135

## 10-50W

RECESSED  
New Model Design  
Non-DIMMABLE  
3-5 YEAR WARRANTY



### Applications:

Ideal for Commercial Lighting, Offices, indoor Lighting.

### GENERAL INFORMATION

Ref.Code:	BE-D2135
Description:	Anti-glare downlight using black light reflector with beads diffuser ,recessed LED luminaire
Product Size(mm):	D86*H55mm/D102*H60mm/D140*H73mm D180*H95mm/D212*H110mm
Cutout(mm):	D70mm/D85mm/D120mm/D160mm/D195m
Color Finish:	Black/White
Installation method:	Recessed
Dimming	Non-Dimmable

### TECHNICAL SPECIFICATIONS

Rated Voltage(V):	AC220-240V
Rated Frequency(Hz):	50-60Hz
Rated Power(W):	10W/20W/30W/40W/50W
Colour Temperature(K):	3000K/4000K/6000K
Led Chip	COB CREE
Luminous Efficiency(Lm/W):	100Lm/W
Beam Angle:	24°/38°/60°
Colour Rendering Index:	80
Power Factor:	0.50
Material:	Die-cast Aluminum
Waterproof Grade:	IP44
Average Life(Hrs):	50,000Hrs
Operation Position:	Universal
Application:	Indoor use

### DETAIL PHOTOES



Black light

Matt Sliver

# ANTI-GLARE LED DOWNLIGHT

Code: # BE-MD117

**10-30W**

SURFACED  
Honeycomb Anti-glare  
AC220-240V  
3-5 YEAR WARRANTY



## Applications:

Ideal for Commercial Lighting, Offices, indoor Lighting.

## GENERAL INFORMATION

Ref.Code:	BE-MD117
Description:	Anti-glare downlight using black light reflector with honeycomb UGR<19
Product Size(mm):	D75*H90mm/D91*H112mm / D128*H137mm
Color Finish:	Black/White
Installation method:	Surfaced/Suspended
Dimming	Non-DIM/Triac DIM/DALI DIM/0-10V DIM

## TECHNICAL SPECIFICATIONS

Rated Voltage(V):	AC220-240V
Rated Frequency(Hz):	50-60Hz
Rated Power(W):	10W/20W/30W
Colour Temperature(K):	3000K/4000K/6000K
Led Chip	COB
Luminous Efficiency(Lm/W):	100Lm/W
Beam Angle:	12°/24°/38°/60°
Colour Rendering Index:	80/95
Power Factor:	0.5/0.9
Material:	Die-cast Aluminum
Waterproof Grade:	IP44
Average Life(Hrs):	50,000Hrs
Operation Position:	Universal
Application:	Indoor use

## DETAIL PHOTOS





# DEEP ANTI-GLARE SPOT LIGHT

Code: # BE-JD8662

**5-15W**

RECESSED  
D40-75mm  
DALI-DIMMABLE  
3-5 YEAR WARRANTY



## Applications:

Ideal for Commercial Lighting, Offices, indoor Lighting.

## GENERAL INFORMATION

Ref.Code:	BE-JD8662
Description:	Deep anti-glare spot light, black frame with deep optical reflector, small cutout recessed LED luminaire
Product Size(mm):	D40*H58mm/D60*H85mm/D75*H100mm
Color Finish	Black + white
Cutout(mm):	D34mm/D50mm/D65mm
Dimming	Non-Dimmable

## TECHNICAL SPECIFICATIONS

Rated Voltage(V):	AC220-240V
Rated Frequency(Hz):	50-60Hz
Rated Power(W):	5W/10W/15W
Colour Temperature(K):	3000K/4000K/6000K
Led Chip	COB
Luminous Flux(Lm):	500lm/1000lm/1500lm
Luminous Efficiency(Lm/W):	100Lm/W
Beam Angle:	24°/38°
Colour Rendering Index:	80
Power Factor:	0.50
Material:	Die-cast Aluminum
Waterproof Grade:	IP44
Average Life(Hrs):	50,000Hrs
Operation Position:	Universal
Application:	Indoor use

## DETAIL PHOTOES




# ANTI-GLARE SMALL SPOT LIGHT

Code: # BE-JD8645

**5W**

RECESSED  
CUTOUT D30mm  
DALI-DIMMABLE  
5 YEAR WARRANTY

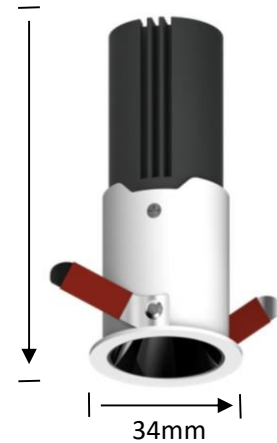

## Applications:

Ideal for Commercial Lighting, Offices, indoor Lighting.

## GENERAL INFORMATION

Ref.Code:	BE-JD8645
Description:	Anti-glare spot light, black reflector with honeycomb, small cutout recessed LED luminaire
Product Size(mm):	D34*H80mm
Color Finish	Black + white
Cutout(mm):	D30mm
Dimming	DALI-Dimmable

## TECHNICAL SPECIFICATIONS

Rated Voltage(V):	AC220-240V
Rated Frequency(Hz):	50-60Hz
Rated Power(W):	5W
Colour Temperature(K):	2700K
Led Chip	CREE 130lm/W
Luminous Flux(Lm):	500lm
Luminous Efficiency(Lm/W):	100Lm/W
Beam Angle:	36°
Colour Rendering Index:	80
Power Factor:	0.50
Material:	Die-cast Aluminum
Waterproof Grade:	IP20
Average Life(Hrs):	50,000Hrs
Operation Position:	Universal
Application:	Indoor use

## DETAIL PHOTOES



# ANTI-GLARE SPOT LIGHT

Code: # BE-JD8698-40

**40W**

RECESSED  
D138\*H152mm  
ADJUSTABLE  
5 YEAR WARRANTY



## Applications:

Ideal for Commercial Lighting, Offices, indoor Lighting.

## GENERAL INFORMATION

Ref.Code:	BE-JD8698
Description:	White surfaced ring with black reflector, recessed LED luminaire
Product Size(mm):	D138*H152mm
Cutout(mm)	D120mm
Color Finish	White
Installation method:	Recessed
Dimming	Non-Dimmable

## TECHNICAL SPECIFICATIONS

Rated Voltage(V):	AC85-265V
Rated Frequency(Hz):	50-60Hz
Rated Power(W):	40W
Colour Temperature(K):	3000K
Led Chip	COB CREE
Luminous Flux(Lm):	4400Lm
Luminous Efficiency(Lm/W):	100Lm/W
Beam Angle:	38°
Colour Rendering Index:	>90
Power Factor:	0.90
Material:	Die-cast Aluminum
Waterproof Grade:	IP54
Average Life(Hrs):	50,000Hrs / 5 Years warranty
Driver:	Tridonic
Application:	Indoor use

## DETAIL PHOTOES



# ANTI-GLARE SPOT LIGHT

Code: # BE-JD8698-12

**12W**

RECESSED  
D76\*H108mm  
ADJUSTABLE  
5 YEAR WARRANTY



## Applications:

Ideal for Commercial Lighting, Offices, indoor Lighting.


## GENERAL INFORMATION

Ref.Code:	BE-JD8698-12
Description:	Recessed trimless LED luminaire, detachable frame, easy installation
Product Size(mm):	D76*H108mm
Cutout(mm)	D75mm
Reflector Color	Chrome / Drak black / matt silver /Gold
Installation method:	Recessed
Dimming	Non-Dimmable

## TECHNICAL SPECIFICATIONS

Rated Voltage(V):	AC85-265V
Rated Frequency(Hz):	50-60Hz
Rated Power(W):	12W
Colour Temperature(K):	3000K-6500K
Led Chip	COB CREE
Luminous Flux(Lm):	1320Lm
Luminous Efficiency(Lm/W):	110Lm/W
Beam Angle:	12°/24°/40°
Colour Rendering Index:	>80
Power Factor:	0.90
Material:	Die-cast Aluminum
Waterproof Grade:	IP54
Average Life(Hrs):	50,000Hrs / 5 Years warranty
Driver:	Tridonic
Application:	Indoor use

## DETAIL PHOTOES

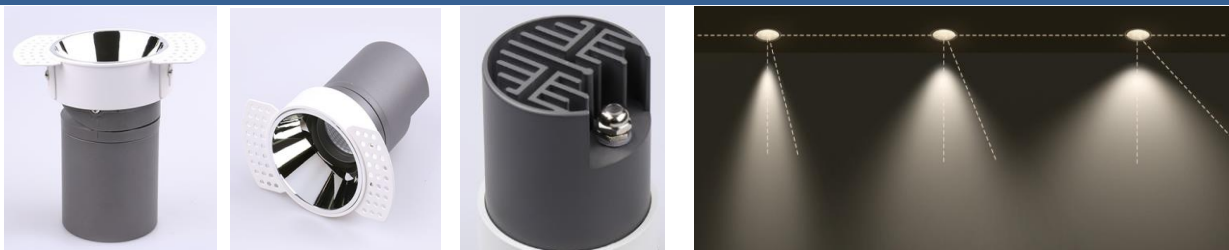

# IE.20.15 SMALL LED SPOT LIGHT

Code: # BE-JD8665-15

**15W**

RECESSED  
D110\*H80mm  
DALI-DIMMABLE  
5 YEAR WARRANTY



## Applications:

Ideal for Commercial Lighting, Offices, indoor Lighting.

## GENERAL INFORMATION

Ref.Code:	BE-JD8665
Description:	White surfaced ring with optical lens, adjustable light angle, recessed LED luminaire
Product Size(mm):	D110*H80mm
Color Finish:	White
Cutout(mm):	D95mm
Installation method:	Recessed
Dimming	DALI-Dimmable

## TECHNICAL SPECIFICATIONS

Rated Voltage(V):	AC220-240V
Rated Frequency(Hz):	50-60Hz
Rated Power(W):	15W
Colour Temperature(K):	4000K
Led Chip	COB CREE
Luminous Flux(Lm):	2100Lm
Luminous Efficiency(Lm/W):	140Lm/W
Beam Angle:	24°
Colour Rendering Index:	80
Power Factor:	0.50
Material:	Die-cast Aluminum
Waterproof Grade:	IP44
Average Life(Hrs):	50,000Hrs
Operation Position:	Universal
Application:	Indoor use

## DETAIL PHOTOES



# IP65 SURFACED DOWNLIGHT

Code: BE-MD118

## 10W-60W

DOWNLIGHT  
IP65 WATERPROOF  
AC85-265V 50/60Hz  
3 YEARS WARRANTY



### Applications:

Ideal for Commercial Lighting, Offices, indoor Lighting.

### GENERAL INFORMATION

POWER	BODY COLOR	RELECTOR	PRODUCT SIZE	DIMMABLE
10W	Black/White	CH/BK/WH	D75*H100mm	Triac/DALI/0-10V
20W	Black/White	CH/BK/WH	D95*H152mm	Triac/DALI/0-10V
30W	Black/White	CH/BK/WH	D115*H152mm	Triac/DALI/0-10V
40W	Black/White	CH/BK/WH	D140*H162mm	Triac/DALI/0-10V
50W	Black/White	CH/BK/WH	D170*H182mm	Triac/DALI/0-10V
60W	Black/White	CH/BK/WH	D205*H212mm	Triac/DALI/0-10V

### TECHNICAL SPECIFICATIONS

Rated Voltage(V):	AC85-265V
Rated Frequency(Hz):	50-60Hz
Rated Power(W):	10W-60W
Colour Temperature(K):	3000K-6000K
Led Chip	COB CREE
Luminous Efficiency(Lm/W):	90Lm/W
Beam Angle:	60 °
Colour Rendering Index:	80
Power Factor:	0.50
Material:	Die-cast Aluminum
Installation:	Surfaced/Suspension
Waterproof Grade:	IP65
Working Temperature:	-20~40°C
Average Life(Hrs):	50,000Hrs
Warranty	3-5 Years
Operation Position:	Universal
Quality Standard:	CE/RoHs
Application:	Airport/Trian station/Shopping mall/ Office/Home/Balcony

# ANTI-GLARE Honeycomb LED Downlight

Code: # BE-D2153

## 7W-20W

RECESSED  
D85mm/D110mm/D125mm  
IP54 Waterproof  
3-Year WARRANTY



### Applications:

Ideal for Commercial Lighting, Offices, indoor Lighting.

### GENERAL INFORMATION

Ref.Code:	BE-D2153
Description:	Recessed honeycomb LED luminaire, using with optical lens and anti-glare reflector, IP54 waterproof
Product Size(mm):	D85*H44mm/ D110*H52mm /D125*H65mm
Cutout(mm)	D75mm/D90mm/D110mm
Reflector Color	Black / White
Installation method:	Recessed
Dimming	Non-Dimmable

### TECHNICAL SPECIFICATIONS

Rated Voltage(V):	AC85-265V
Rated Frequency(Hz):	50-60Hz
Rated Power(W):	7W/12W/20W
Colour Temperature(K):	3000K-6500K
Led Chip	COB
Luminous Flux(Lm):	1320Lm
Luminous Efficiency(Lm/W):	90Lm/W
Beam Angle:	15°/24°/38°/60°
Colour Rendering Index:	>80
Power Factor:	0.50
Material:	Die-cast Aluminum
Waterproof Grade:	IP54
Average Life(Hrs):	35,000Hrs / 3 Years warranty
Driver:	DLY
Application:	Indoor use

### DETAIL PHOTOES



# IP54 Waterproof LED Downlight

Code: # BE-D2158

**24W**

RECESSED  
DALI DIMMABLE  
IP54 Waterproof  
5-Year WARRANTY



## Applications:

Ideal for Commercial Lighting, Offices, indoor Lighting.

## GENERAL INFORMATION

Ref.Code:	BE-D2158
Description:	Recessed IP65 waterproof downlight,integrated housing with deep anti-glare reflector
Product Size(mm):	D160*H84mm
Cutout(mm)	D140mm
Reflector Color	White
Installation method:	Recessed
Dimming	DALI-Dimmable

## TECHNICAL SPECIFICATIONS

Rated Voltage(V):	AC85-265V
Rated Frequency(Hz):	50-60Hz
Rated Power(W):	24W
Colour Temperature(K):	3000K-6500K
Led Chip	COB CREE
Luminous Flux(Lm):	2880Lm
Luminous Efficiency(Lm/W):	120Lm/W
Beam Angle:	38°/60°
Colour Rendering Index:	>80
Power Factor:	0.50
Material:	Die-cast Aluminum
Waterproof Grade:	IP54
Average Life(Hrs):	50,000Hrs / 5 Years warranty
Driver:	AI-Dimming
Application:	Indoor use

## DETAIL PHOTOES



Strong heat dissipation  
Strictly made of thick aluminum



Waterproof lamp body design



High purity aluminum lamp body



COB with high lumen output  
and high CRI



The lamp body is waterproof | Aluminum lamp body



# IP54 Waterproof LED Downlight

Code: # BE-D2158

**60W**

RECESSED  
DALI DIMMABLE  
IP54 Waterproof  
5-Year WARRANTY



## Applications:

Ideal for Commercial Lighting, Offices, indoor Lighting.

## GENERAL INFORMATION

Ref.Code:	BE-D2158
Description:	Recessed IP65 waterproof downlight, integrated housing with deep anti-glare reflector
Product Size(mm):	D225*H115mm
Cutout(mm)	D200mm
Reflector Color	White
Installation method:	Recessed
Dimming	DALI-Dimmable

## TECHNICAL SPECIFICATIONS

Rated Voltage(V):	AC85-265V
Rated Frequency(Hz):	50-60Hz
Rated Power(W):	60W
Colour Temperature(K):	3000K-6500K
Led Chip	COB CREE
Luminous Flux(Lm):	7200Lm
Luminous Efficiency(Lm/W):	120Lm/W
Beam Angle:	38°/60°
Colour Rendering Index:	>80
Power Factor:	0.50
Material:	Die-cast Aluminum
Waterproof Grade:	IP54
Average Life(Hrs):	50,000Hrs / 5 Years warranty
Driver:	AI-Dimming
Application:	Indoor use

## DETAIL PHOTOES

